

19

Wall Recessed & Inground


Pages 515-544

MR16 | GU10 | GX53 | COB LED | SMD LED | LED

Die cast | Natural aluminium | Stainless steel | Gypsum | Plastic


 IP20 IP44 IP54 IP65 IP67


 ADJUSTABLE DIMMABLE DARK LIGHT QUICK FIX IK⁰⁸ IK¹⁰ CE 80 CRI 85 CRI 90 CRI 2 YEAR 3 YEAR 5 YEAR


Indoor Square Wall Recessed




68054 | 50W | MR16 | GU10 | Gypsum



Suitable for LED GU10 lamp.

1120x120mm



70x88mm



65mm



E-A⁺⁺


DARK LIGHT
IP20



68006 | 1W | LED | Die cast



85mm



85mm



A-A⁺⁺

DARK LIGHT
IP44



68007 | 1,5W | LED | Plastic

Supplied with box for concrete installation.



94mm



94mm

35mm



A-A⁺⁺

DARK LIGHT
IP20

Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class	⏏	⏏	⏏	📦	Notes
68054	White	-	-	50W	100-240V	□	15cm	121x121mm	95mm	24	-
68006/G/W	Grey	Warm white	3000K	1W	230V	□	12cm	75x75mm	60mm	100	Complete with 350mA driver
68007/W/W	White	Warm white	3000K	1,5W	100-240V	□	-	86x86mm	40mm	50	Complete with driver

one



68005/G/D

Indoor Dark Light Wall Recessed

68008/G/D

68005 | 1W | LED | Die cast

For concrete installation, order 68005/BOX.



A-A+ 68005/G/D


DARK LIGHT
 IP20
 2 YEAR
 LED BUILT IN
 DIMMABLE
 QUICK FIX
 CE



68005/G/W



68005/BOX

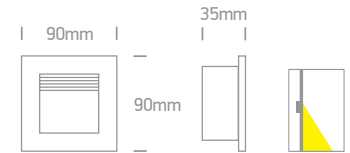

68005 | 1W | LED | Die cast

For concrete installation, order 68005/BOX.



68005/G/BL


DARK LIGHT
 IP20
 2 YEAR
 LED BUILT IN
 DIMMABLE
 QUICK FIX
 CE
offer



offer 68005/G/GR



68005/BOX

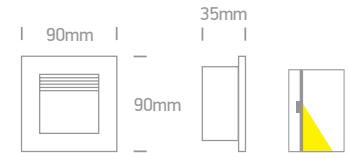

68008 | 1W | LED | Die cast

For concrete installation, order 68008/BOX.



A-A+ 68008/G/D


DARK LIGHT
 IP20
 2 YEAR
 LED BUILT IN
 DIMMABLE
 QUICK FIX
 CE
offer



offer 68008/G/W



68008/BOX

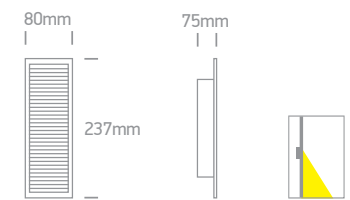

68008 | 1W | LED | Die cast

For concrete installation, order 68008/BOX.




68008/G/BL

DARK LIGHT
 IP20
 2 YEAR
 LED BUILT IN
 DIMMABLE
 QUICK FIX
 CE
offer



68008/BOX

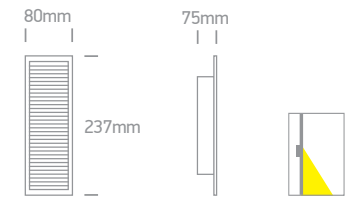

Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class					Notes
68005/G/D	Grey	Daylight	6000K	1W	350mA		50cm	73x73mm	40mm	50	Requires 350mA driver
68005/G/W	Grey	Warm white	3000K	1W	350mA		50cm	73x73mm	40mm	50	Requires 350mA driver
68005/G/BL	Grey	Blue	-	1W	350mA		50cm	73x73mm	40mm	50	Requires 350mA driver
68005/G/GR	Grey	Green	-	1W	350mA		50cm	73x73mm	40mm	50	Requires 350mA driver
68008/G/D	Grey	Daylight	6000K	1W	350mA		50cm	65x212mm	90mm	20	Requires 350mA driver
68008/G/W	Grey	Warm white	3000K	1W	350mA		50cm	65x212mm	90mm	20	Requires 350mA driver
68008/G/BL	Grey	Blue	-	1W	350mA		50cm	65x212mm	90mm	20	Requires 350mA driver


Outdoor Decorative Wall Recessed

Die cast




68052 | 4W | SMD 2835 | Die cast

Supplied with box for concrete installation.

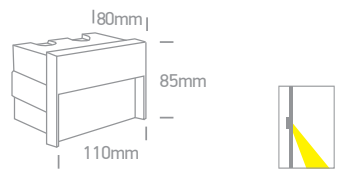

68052A | 5W | SMD 2835 | Die cast

Supplied with box for concrete installation.

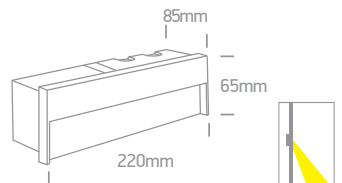

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Concrete installation	Gypsum installation	Height	Box	Notes
68052/W/W	White	Warm white	3000K	4W	400lm	100-240V	Ⓟ	100x70mm	95x70mm	80mm	20	Complete with 350mA driver
68052/AN/W	Anthracite	Warm white	3000K	4W	400lm	100-240V	Ⓟ	100x70mm	95x70mm	80mm	20	Complete with 350mA driver
68052/G/W	Grey	Warm white	3000K	4W	400lm	100-240V	Ⓟ	100x70mm	95x70mm	80mm	20	Complete with 350mA driver
68052A/W/W	White	Warm white	3000K	5W	500lm	100-240V	Ⓟ	205x54mm	205x50mm	80mm	18	Complete with 350mA driver
68052A/AN/W	Anthracite	Warm white	3000K	5W	500lm	100-240V	Ⓟ	205x54mm	205x50mm	80mm	18	Complete with 350mA driver



Outdoor Wall Recessed Die cast



68046 | 2x1W | LED | Die cast

Supplied with box for concrete installation.




IP65



68046/W/W



68046/G/W



68048 | 4x1W | LED | Die cast

Supplied with box for concrete installation.




IP65



68048/W/W



68048/G/W



68050 | 6x1W | LED | Die cast

Supplied with box for concrete installation.




IP65



68050/W/W



68050/G/W

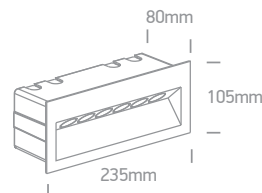

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	⚡	↕	📦	Notes
68046/W/W	White	Warm white	3000K	2x1W	140lm	100-240V	⊕	100x100mm	100mm	20	Complete with 350mA driver
68046/AN/W	Anthracite	Warm white	3000K	2x1W	140lm	100-240V	⊕	100x100mm	100mm	20	Complete with 350mA driver
68046/G/W	Grey	Warm white	3000K	2x1W	140lm	100-240V	⊕	100x100mm	100mm	20	Complete with 350mA driver
68048/W/W	White	Warm white	3000K	4x1W	280lm	100-240V	⊕	170x90mm	100mm	12	Complete with 350mA driver
68048/AN/W	Anthracite	Warm white	3000K	4x1W	280lm	100-240V	⊕	170x90mm	100mm	12	Complete with 350mA driver
68048/G/W	Grey	Warm white	3000K	4x1W	280lm	100-240V	⊕	170x90mm	100mm	12	Complete with 350mA driver
68050/W/W	White	Warm white	3000K	6x1W	420lm	100-240V	⊕	220x90mm	100mm	8	Complete with 350mA driver
68050/AN/W	Anthracite	Warm white	3000K	6x1W	420lm	100-240V	⊕	220x90mm	100mm	8	Complete with 350mA driver
68050/G/W	Grey	Warm white	3000K	6x1W	420lm	100-240V	⊕	220x90mm	100mm	8	Complete with 350mA driver



Indoor Decorative Wall Recessed





A-A+ 68070A/W/W

68070A | 1W | LED | Die cast

Driver can not pass through the cutout hole.


new
DARK LIGHT
IP20

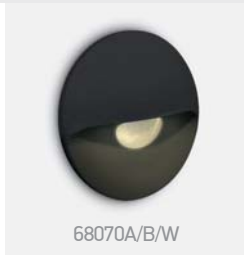

68070A/B/W



68070A/AL/W

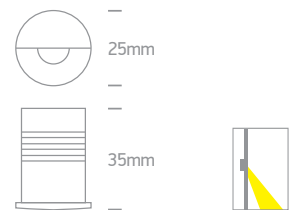


A-A+ 68004B/W/W

68004B | 1W | LED | Die cast

Driver can not pass through the cutout hole.


new
DARK LIGHT
IP20



68004B/B/W



68004B/AL/W

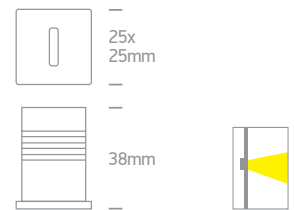


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	⏏	🔧	⏏	📦	Notes
68070A/W/W	White	Warm white	3000K	1W	60lm	350mA	III	40cm	20mm	45mm	100	Requires 350mA driver
68070A/B/W	Black	Warm white	3000K	1W	60lm	350mA	III	40cm	20mm	45mm	100	Requires 350mA driver
68070A/AL/W	Aluminium	Warm white	3000K	1W	60lm	350mA	III	40cm	20mm	45mm	100	Requires 350mA driver
68004B/W/W	White	Warm white	3000K	1W	50lm	350mA	III	40cm	20mm	50mm	100	Requires 350mA driver
68004B/B/W	Black	Warm white	3000K	1W	50lm	350mA	III	40cm	20mm	50mm	100	Requires 350mA driver
68004B/AL/W	Aluminium	Warm white	3000K	1W	50lm	350mA	III	40cm	20mm	50mm	100	Requires 350mA driver

Indoor/Outdoor Decorative Wall Recessed Aluminium



A-A++ 68070/W/W

68070 | 1W | COB LED | Aluminium




IP65



68070/B/W



68070/AL/W

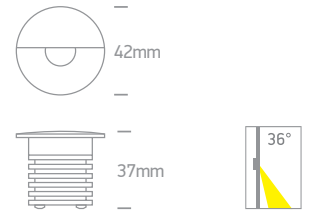

A-A++ 68004/W/W


68004 | 3W | COB LED | Aluminium



DARK LIGHT
IP54




68004/AL/W

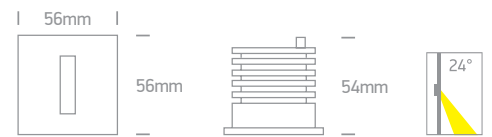

A-A++ 68004A/W/W

68004A | 1W | COB LED | Aluminium



DARK LIGHT
IP54



68004A/AL/W



Supplied with box for concrete installation.

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	S	Concrete installation	Gypsum installation	Box	Notes		
68070/W/W	White	Warm white	3000K	1W	50lm	36°	350mA	III	200cm	30mm	60mm	30mm	60mm	100	Requires 350mA driver
68070/B/W	Black	Warm white	3000K	1W	50lm	36°	350mA	III	200cm	30mm	60mm	30mm	60mm	100	Requires 350mA driver
68070/AL/W	Aluminium	Warm white	3000K	1W	50lm	36°	350mA	III	200cm	30mm	60mm	30mm	60mm	100	Requires 350mA driver
68004/W/W	White	Warm white	3000K	3W	120lm	24°	350mA	III	100cm	49mm	110mm	49mm	70mm	36	Requires 350mA driver
68004/AL/W	Aluminium	Warm white	3000K	3W	120lm	24°	350mA	III	100cm	49mm	110mm	49mm	70mm	36	Requires 350mA driver
68004A/W/W	White	Warm white	3000K	1W	40lm	60°	350mA	III	200cm	36mm	50mm	33mm	30mm	60	Requires 350mA driver
68004A/AL/W	Aluminium	Warm white	3000K	1W	40lm	60°	350mA	III	200cm	36mm	50mm	33mm	30mm	60	Requires 350mA driver



Indoor/Outdoor Dark Light Wall Recessed



A-A++ 68030/W/W



68030 | 3W | LED | Aluminium



LED BUILT IN





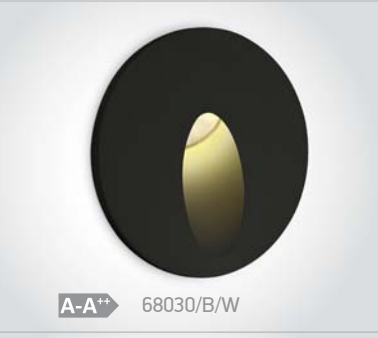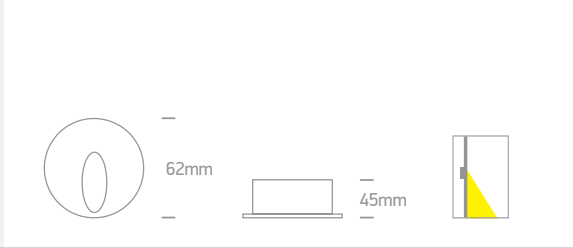

A-A++ 68030/B/W


68030 | 3W | LED | Aluminium



LED BUILT IN





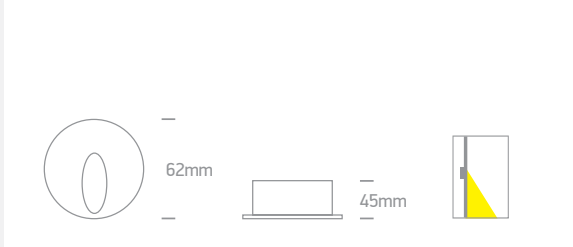
















A-A++ 68030/AL/W

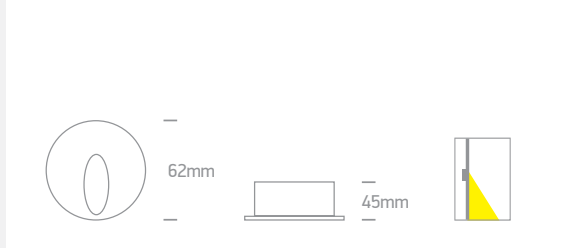68030 | 3W | LED | Natural aluminium




LED BUILT IN



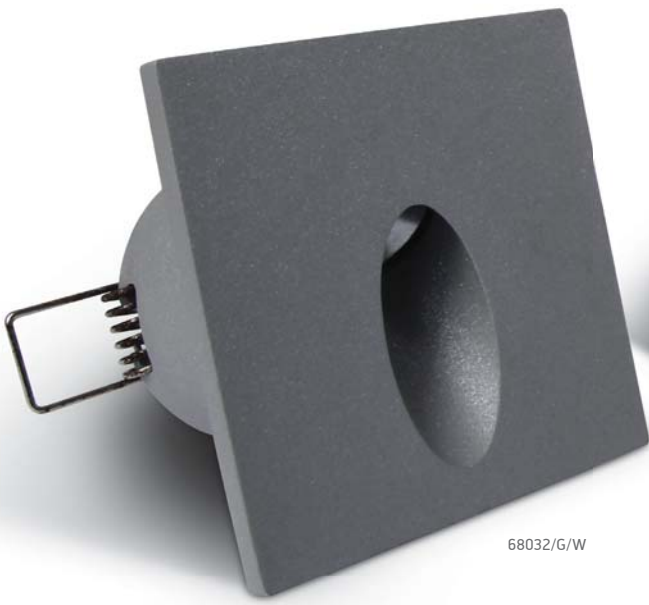

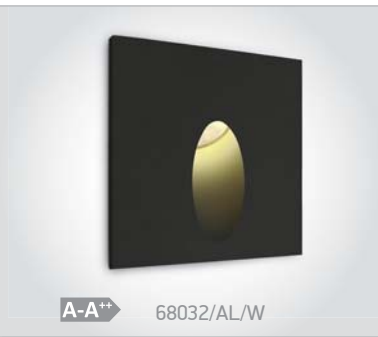

Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class					Notes
68030/W/W	White	Warm white	3000K	3W	100-240V		52mm	110mm	50mm	30	Complete with 700mA driver
68030/B/W	Black	Warm white	3000K	3W	100-240V		52mm	110mm	50mm	30	Complete with 700mA driver
68030/AL/W	Aluminium	Warm white	3000K	3W	100-240V		52mm	110mm	50mm	30	Complete with 700mA driver



Indoor/Outdoor Dark Light Wall Recessed




68032 | 3W | LED | Die cast

new
DARK LIGHT
IP54



Supplied with box for concrete installation.

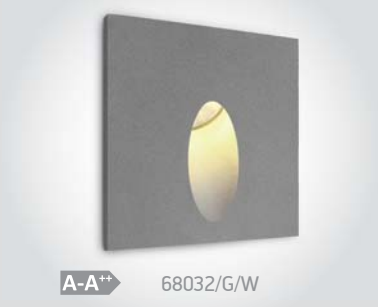

68032 | 3W | LED | Die cast

DARK LIGHT
IP54



Supplied with box for concrete installation.



68032 | 3W | LED | Natural aluminium

DARK LIGHT
IP54



Supplied with box for concrete installation.




Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class					Notes
68032/B/W	Black	Warm white	3000K	3W	100-240V		52mm	110mm	50mm	30	Complete with 700mA driver
68032/G/W	Grey	Warm white	3000K	3W	100-240V		52mm	110mm	50mm	30	Complete with 700mA driver
68032/AL/W	Aluminium	Warm white	3000K	3W	100-240V		52mm	110mm	50mm	30	Complete with 700mA driver




Dark Light Step Series

Aluminium




A-A++ 68074/B/W


68074 | 2W | COB LED | Aluminium




LED
BUILT IN




85
CRI




DIMMABLE




QUICK FIX




IP65




IK08




CE



2
YEAR




68074/W/W





A-A++ 68074A/B/W


68074A | 2W | COB LED | Aluminium




LED
BUILT IN



85
CRI




DIMMABLE




QUICK FIX




IP65



IK08



CE



2
YEAR



68074A/W/W





A-A++ 68074B/B/W

68074B | 2W | COB LED | Aluminium



LED
BUILT IN



85
CRI



DIMMABLE



QUICK FIX



IP65



IK08



CE












2
YEAR



68074B/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
68074/W/W	White	Warm white	3000K	2W	100lm	700mA		200cm	35mm	55mm	100	Requires 700mA driver
68074/B/W	Black	Warm white	3000K	2W	100lm	700mA		200cm	35mm	55mm	100	Requires 700mA driver
68074A/W/W	White	Warm white	3000K	2W	100lm	700mA		200cm	35mm	55mm	100	Requires 700mA driver
68074A/B/W	Black	Warm white	3000K	2W	100lm	700mA		200cm	35mm	55mm	100	Requires 700mA driver
68074B/W/W	White	Warm white	3000K	2W	110lm	700mA		200cm	35mm	55mm	100	Requires 700mA driver
68074B/B/W	Black	Warm white	3000K	2W	110lm	700mA		200cm	35mm	55mm	100	Requires 700mA driver



The Glass Face Recessed Lights




A-A+ 68076/W/W

new
DARK LIGHT
IP65


68076 | 4W | SMD LED | Glass + metal

Supplied with box for concrete installation.

LED BUILT IN
80 CRI
CE
2 YEAR

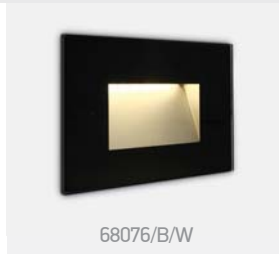

68076/B/W

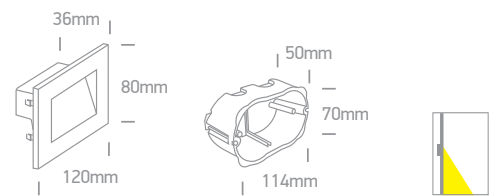


A-A+ 68076A/W/W

new
DARK LIGHT
IP65


68076A | 5W | SMD LED | Glass + metal

Supplied with box for concrete installation.

LED BUILT IN
80 CRI
CE
2 YEAR

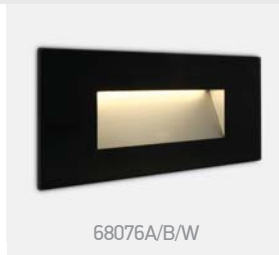

68076A/B/W

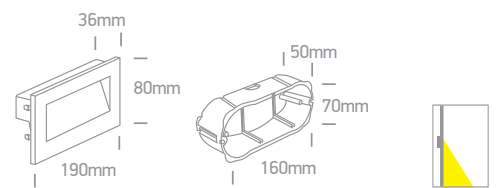


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Concrete installation	Gypsum installation	↑ ↓	📦	Notes
68076/W/W	White	Warm white	3000K	4W	300lm	230V	☐	115x70mm	2x68mm	55mm	12	AC LED
68076/B/W	Black	Warm white	3000K	4W	300lm	230V	☐	115x70mm	2x68mm	55mm	12	AC LED
68076A/W/W	White	Warm white	3000K	5W	350lm	230V	☐	160x70mm	3x68mm	55mm	12	AC LED
68076A/B/W	Black	Warm white	3000K	5W	350lm	230V	☐	160x70mm	3x68mm	55mm	12	AC LED



Wall Recessed Pro Range




68058 | 3,7W | SMD LED | Stainless steel 316




IP65

A-A

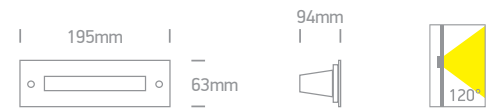


68060 | 6,7W | SMD LED | Die cast



DARK LIGHT
IP65

A-A

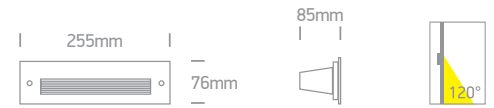


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	🔧	📏	📦	Notes
68058/W	Stainless steel	Warm white	3000K	3,7W	46lm	120°	230V	Ⓛ	50cm	180x58mm	97mm	12	Complete with driver
68060/W	Grey	Warm white	3000K	6,7W	56lm	120°	230V	Ⓛ	50cm	240x70mm	88mm	8	Complete with driver




Wall Recessed Pro Range



68072A | 5W | SMD 2835 | Stainless steel 316 + tempered glass



Supplied with box for concrete installation.




A-A⁺⁺


IP65



68072B | 7W | SMD 2835 | Stainless steel 316 + tempered glass



Supplied with box for concrete installation.




A-A⁺⁺


IP65



68072C | 10W | SMD 2835 | Stainless steel 316 + tempered glass



Supplied with box for concrete installation.



A-A⁺⁺

IP65

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Concrete installation	Gypsum installation	Height	Box	Notes
68072A/W	Stainless steel	Warm white	3000K	5W	100lm	230V	⊕	112x42mm	98x35mm	75mm	24	Complete with 350mA driver
68072B/W	Stainless steel	Warm white	3000K	7W	140lm	230V	⊕	182x55mm	164x45mm	75mm	12	Complete with 350mA driver
68072C/W	Stainless steel	Warm white	3000K	10W	200lm	230V	⊕	253x55mm	240x45mm	75mm	12	Complete with 350mA driver

Outdoor Dark Light Wall Recessed


Die cast



A-A+ 68068/W/W

68068 | 3W | SMD 2835 | Die cast


Supplied with box for concrete installation.

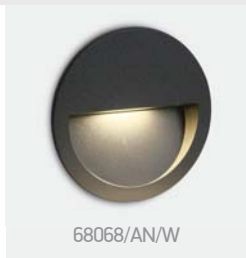

68068/AN/W



68068/G/W

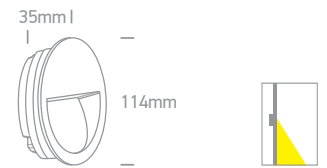

A-A+ 68068A/W/W

68068A | 3W | SMD 2835 | Die cast

Supplied with box for concrete installation.




68068A/AN/W



68068A/B/W




68068A/G/W

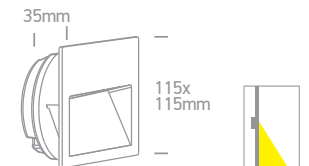

A-A+ 68068C/W/W

68068C | 6W | SMD 2835 | Die cast

Supplied with box for concrete installation.




68068C/AN/W



68068C/B/W



68068C/G/W

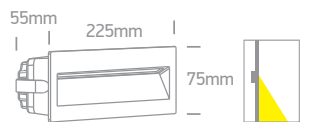

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Concrete installation	Gypsum installation	Height	Box	Notes
68068/W/W	White	Warm white	3000K	3W	300lm	100-240V	⊕	110mm	100mm	60mm	24	Complete with 350mA driver
68068/AN/W	Anthracite	Warm white	3000K	3W	300lm	100-240V	⊕	110mm	100mm	60mm	24	Complete with 350mA driver
68068/G/W	Grey	Warm white	3000K	3W	300lm	100-240V	⊕	110mm	100mm	60mm	24	Complete with 350mA driver
68068A/W/W	White	Warm white	3000K	3W	300lm	100-240V	⊕	110x110mm	100mm	60mm	24	Complete with 350mA driver
68068A/AN/W	Anthracite	Warm white	3000K	3W	300lm	100-240V	⊕	110x110mm	100mm	60mm	24	Complete with 350mA driver
68068A/B/W	Black	Warm white	3000K	3W	300lm	100-240V	⊕	110x110mm	100mm	60mm	24	Complete with 350mA driver
68068A/G/W	Grey	Warm white	3000K	3W	300lm	100-240V	⊕	110x110mm	100mm	60mm	24	Complete with 350mA driver
68068C/W/W	White	Warm white	3000K	6W	550lm	100-240V	⊕	220x70mm	210x60mm	80mm	12	Complete with 350mA driver
68068C/AN/W	Anthracite	Warm white	3000K	6W	550lm	100-240V	⊕	220x70mm	210x60mm	80mm	12	Complete with 350mA driver
68068C/B/W	Black	Warm white	3000K	6W	550lm	100-240V	⊕	220x70mm	210x60mm	80mm	12	Complete with 350mA driver
68068C/G/W	Grey	Warm white	3000K	6W	550lm	100-240V	⊕	220x70mm	210x60mm	80mm	12	Complete with 350mA driver



68066/AN/W



68064/G/W



68062/G/W

Outdoor Dark Light Wall Recessed


Die cast



A-A+ 68062/W/W

68062 | 3,6W | LED | Die cast


Supplied with box for concrete installation.

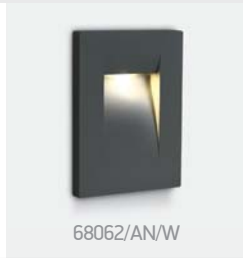

68062/AN/W



68062/G/W

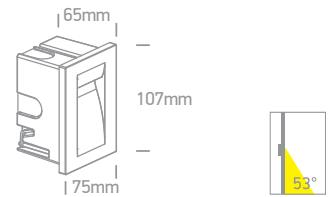

A-A+ 68064/W/W

68064 | 3,6W | LED | Die cast


Supplied with box for concrete installation.



68064/AN/W



68064/G/W

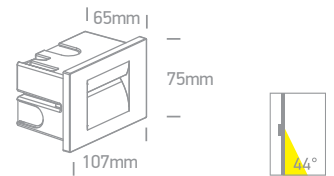

A-A+ 68066/W/W

68066 | 8,5W | SMD LED | Die cast


Supplied with box for concrete installation.



68066/AN/W



68066/G/W

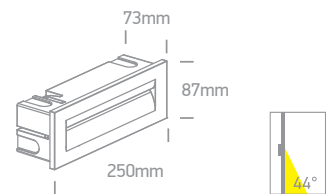



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Concrete installation	Gypsum installation	Height	Width	Notes
68062/W/W	White	Warm white	3000K	3,6W	100lm	53°	100-240V	Ⓢ	62x97mm	60x95mm	65mm	24	Complete with 350mA driver
68062/AN/W	Anthracite	Warm white	3000K	3,6W	100lm	53°	100-240V	Ⓢ	62x97mm	60x95mm	65mm	24	Complete with 350mA driver
68062/G/W	Grey	Warm white	3000K	3,6W	100lm	53°	100-240V	Ⓢ	62x97mm	60x95mm	65mm	24	Complete with 350mA driver
68064/W/W	White	Warm white	3000K	3,6W	85lm	44°	100-240V	Ⓢ	97x62mm	95x60mm	65mm	24	Complete with 350mA driver
68064/AN/W	Anthracite	Warm white	3000K	3,6W	85lm	44°	100-240V	Ⓢ	97x62mm	95x60mm	65mm	24	Complete with 350mA driver
68064/G/W	Grey	Warm white	3000K	3,6W	85lm	44°	100-240V	Ⓢ	97x62mm	95x60mm	65mm	24	Complete with 350mA driver
68066/W/W	White	Warm white	3000K	8,5W	160lm	44°	100-240V	Ⓢ	238x74mm	238x74mm	80mm	12	Complete with 500mA driver
68066/AN/W	Anthracite	Warm white	3000K	8,5W	160lm	44°	100-240V	Ⓢ	238x74mm	238x74mm	80mm	12	Complete with 500mA driver
68066/G/W	Grey	Warm white	3000K	8,5W	160lm	44°	100-240V	Ⓢ	238x74mm	238x74mm	80mm	12	Complete with 500mA driver

Outdoor Dark Light Wall Recessed

Die cast





68022 | 1,4W | LED | Die cast

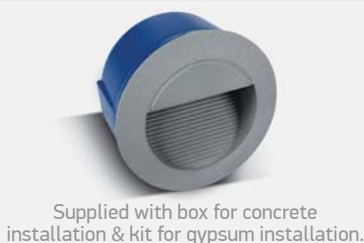

A-A**




68024 | 1,4W | LED | Die cast

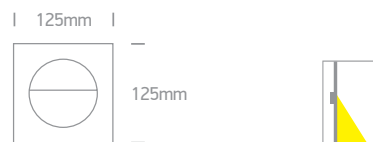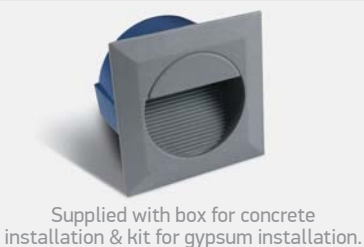

A-A**




68012 | 1,5W | LED | Die cast

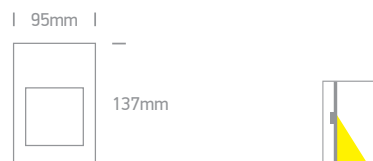

A-A**



68016 | 2W | LED | Die cast

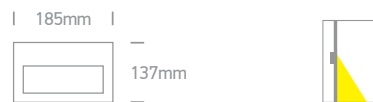


A-A**

Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class				Notes
68022/G/W	Grey	Warm white	3000K	1,4W	230V		105mm	70mm	24	AC LED
68024/G/W	Grey	Warm white	3000K	1,4W	230V		105mm	70mm	24	AC LED
68012/B/W	Black	Warm white	3000K	1,5W	230V		80x120mm	90mm	24	AC LED
68012/G/D	Grey	Daylight	6000K	1,5W	230V		80x120mm	90mm	24	AC LED
68012/G/W	Grey	Warm white	3000K	1,5W	230V		80x120mm	90mm	24	AC LED
68016/B/W	Black	Warm white	3000K	2W	230V		170x120mm	90mm	18	AC LED
68016/G/W	Grey	Warm white	3000K	2W	230V		170x120mm	90mm	18	AC LED




Wall Recessed Light Line


Die cast




A-A⁺⁺


68044 | 3W | LED | Die cast









Supplied with box for concrete installation.





Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class				Notes
68044/W/W	White	Warm white	3000K	3W	100-240V		40x185mm	80mm	18	Complete with 700mA driver



The Inground Mini Series


Natural aluminium



69042M | 1W/2W | LED | Aluminium | 1W@350mA / 2W@700mA

new
IP67

LED BUILT IN
80 CRI
DIMMABLE
IK08
CE
2 YEAR

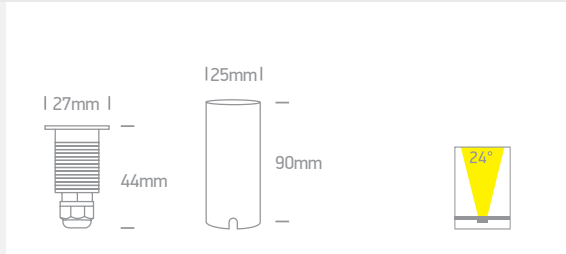


69042 | 1W | SMD LED | Natural aluminium

Supplied with box for concrete installation.

IP67

LED BUILT IN
85 CRI
DIMMABLE
IK08
CE
2 YEAR

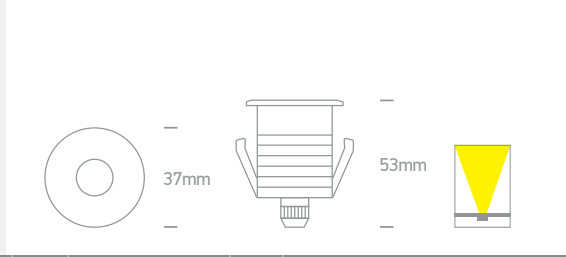


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	S	Gypsum/Decking	Concrete	Decking	Concrete	Notes
69042M/AL/W	Aluminium	Warm white	3000K	1W/2W	150lm	24°	350mA/700mA	II	200cm	22mm	26mm	60mm	95+300mm drainage	50 Requires 350mA/700mA driver
69042/AL/W	Aluminium	Warm white	3000K	1W	80lm	-	350mA	II	200cm	30mm	35mm	80mm	95+300mm drainage	50 Requires 350mA driver






The Inground Mini Series

Natural aluminium

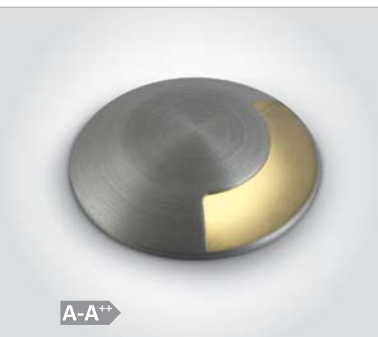



69042A | 1W | SMD LED | Natural aluminium

Supplied with box for concrete installation.

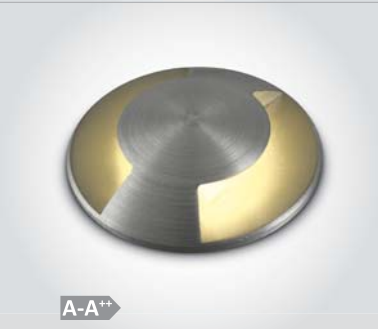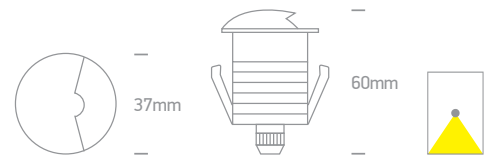


69042B | 1W | SMD LED | Natural aluminium

Supplied with box for concrete installation.

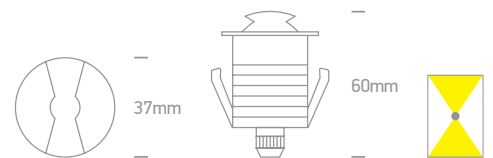

69044 | 1W | LED | Natural aluminium

Supplied with box for concrete installation.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	S	Decking	Concrete	Decking	Concrete	Notes
69042A/AL/W	Aluminium	Warm white	3000K	1W	30lm	350mA	III	200cm	30mm	35mm	80mm	95mm+300mm drainage	50 Requires 350mA driver
69042B/AL/W	Aluminium	Warm white	3000K	1W	50lm	350mA	III	200cm	30mm	35mm	80mm	95mm+300mm drainage	50 Requires 350mA driver
69044/AL/W	Aluminium	Warm white	3000K	1W	30lm	350mA	III	200cm	30mm	35mm	80mm	95mm+300mm drainage	50 Requires 350mA driver



Outdoor Wall Recessed


Stainless steel / Brass



68001 | 1,6W | LED | Stainless steel




IP54



68002 | 1,2W | LED | Brass



IP54



68003 | 1,6W | LED | Stainless steel



IP54



Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class	Concrete installation	Gypsum installation	Height	Box	Notes
68001/W	Stainless steel	Warm white	3000K	1,6W	230V	⊕	97x97mm	90x90mm	65mm	18	Complete with driver
68002/BS/W	Brass	Warm white	3000K	1,2W	230V	⊕	105x35mm	100x35mm	65mm	40	Complete with driver
68003/D	Stainless steel	Daylight	6000K	1,6W	230V	⊕	158x55mm	160x55mm	70mm	18	Complete with driver



Outdoor Wall Colours Recessed

Stainless steel




68001 | 1,6W | LED | Stainless steel



IP54
offer

LED
BUILT IN




68001 | 1,6W | LED | Stainless steel



IP54
offer

LED
BUILT IN




68002 | 1,2W | LED | Stainless steel



IP54
offer


LED
BUILT IN




Order Code	Colour	Light Colour	Watts	Input	Class	Concrete installation	Gypsum installation	Height	Box	Notes
68001/BL	Stainless steel	Blue	1,6W	230V	⊕	97x97mm	90x90mm	65mm	18	Complete with driver
68001/R	Stainless steel	Red	1,6W	230V	⊕	97x97mm	90x90mm	65mm	18	Complete with driver
68002/R	Stainless steel	Red	1,2W	230V	⊕	105x35mm	100x35mm	65mm	40	Complete with driver





The Inground Medium Series GU10

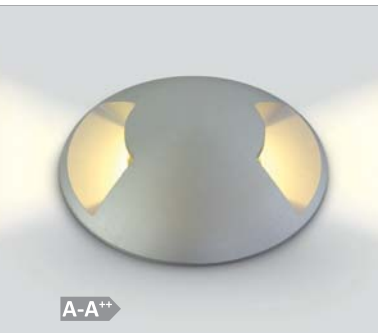


69016G | 10W | MR16 | GU10 | Aluminium





IP67

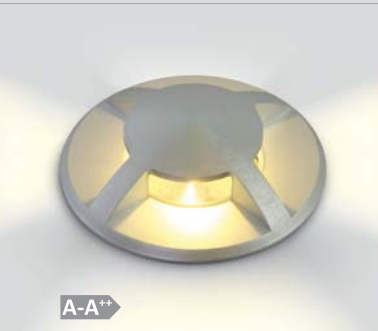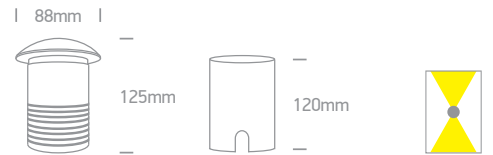


69016AG | 10W | MR16 | GU10 | Aluminium




IP67

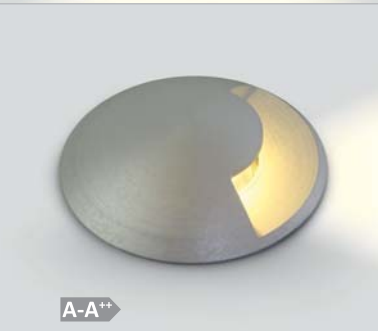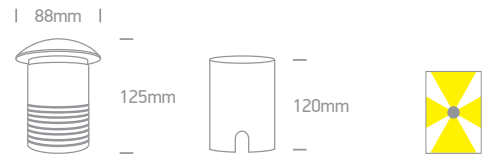

69016BG | 10W | MR16 | GU10 | Aluminium




IP67

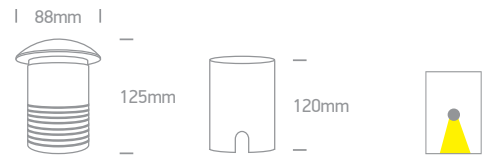

Order Code	Colour	Watts	Input	Class					Notes
69016G	Aluminium	10W	100-240V		200cm	80mm	130mm+300mm drainage	18	1 gland
69016AG	Aluminium	10W	100-240V		200cm	80mm	130mm+300mm drainage	18	1 gland
69016BG	Aluminium	10W	100-240V		200cm	80mm	130mm+300mm drainage	18	1 gland

The Inground Medium Series 3W Aluminium

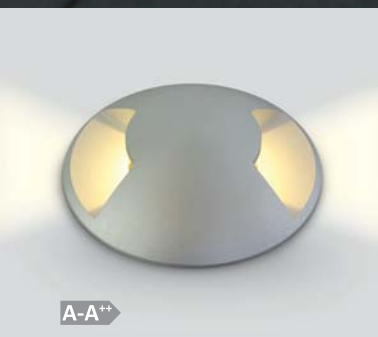


A-A⁺⁺

69016 | 3W | LED | Aluminium



IP67


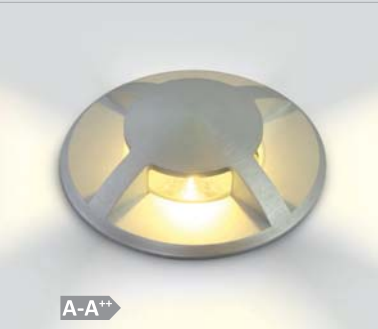


A-A⁺⁺

69016A | 3W | LED | Aluminium



IP67

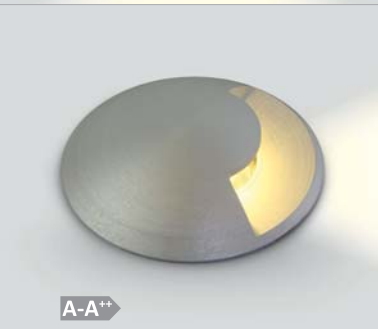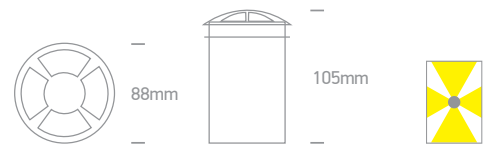

A-A⁺⁺

69016B | 3W | LED | Aluminium



IP67



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	⏏	⏏	⏏	📦	Notes
69016/W	Aluminium	Warm white	3000K	3W	120lm	100-240V	⏏	200cm	77mm	105mm+300mm drainage	18	Complete with 350mA driver
69016A/W	Aluminium	Warm white	3000K	3W	150lm	100-240V	⏏	200cm	77mm	105mm+300mm drainage	18	Complete with 350mA driver
69016B/W	Aluminium	Warm white	3000K	3W	100lm	100-240V	⏏	200cm	77mm	105mm+300mm drainage	18	Complete with 350mA driver



The COB Inground Range



2-6W



A-A++

IP67


69028 | 2W | LED | Stainless steel 316

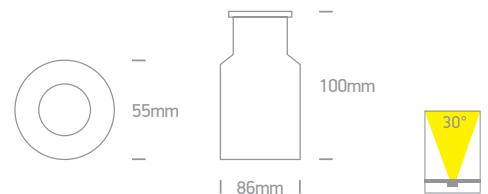

A-A++

IP67

69012 | 3W | COB LED | Stainless steel 316



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏏	⚡	⬆️	📦	Notes
69028/W	Stainless steel	Warm white	3000K	2W	65lm	30°	230V	Ⓛ	50cm	86mm	100mm+300mm drainage	24	Complete with 600mA driver
69012/W	Stainless steel	Warm white	3000K	3W	240lm	35°	100-240V	Ⓛ	200cm	65mm	120mm+300mm drainage	20	Complete with 350mA driver



69052/W



69052A/W



The COB Honeycomb Range



A-A++

IP67


69052 | 3W | COB LED | Stainless steel 316 + tempered glass

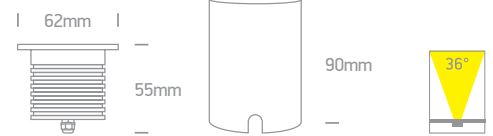

A-A++

IP67

69052A | 13W | COB LED | Aluminium



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏏	⚡	⏏	📦	Notes
69052/W	Stainless steel	Warm white	3000K	3W	240lm	36°	24V DC	⏏	200cm	52mm	100mm+300mm drainage	50	Requires 24V DC driver
69052A/W	Aluminium	Warm white	3000K	13W	1000lm	36°	350mA	⏏	200cm	75mm	140mm+300mm drainage	24	Requires 350mA driver

The COB Inground Range



10-35W



A-A++

IP67

69040 | 10W | COB LED | Stainless steel 316

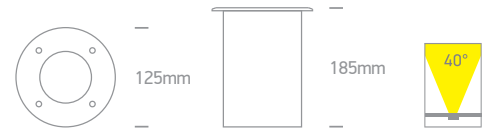


A-A++

IP67

69050 | 20W | COB LED | Stainless steel 316 + tempered glass

Removable honeycomb / TRIAC Dimmable.



1 gland + honeycomb ring




A-A++

IP67

69050A | 20W | COB LED | Stainless steel 316 + tempered glass

Removable honeycomb / TRIAC Dimmable.





1 gland + honeycomb ring



A-A++

IP67

69026 | 35W | COB LED | Stainless steel 316

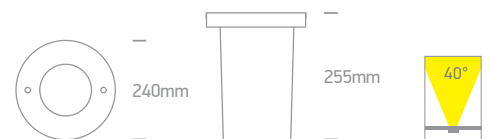

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏏	⚡	⏏	📦	Notes
69040/W	Stainless steel	Warm white	3000K	10W	700lm	40°	230V	⏏	50cm	106mm	185mm+300mm drainage	6	Complete with 250mA driver
69050/W	Stainless steel	Warm white	3000K	20W	1800lm	25°	230V	⏏	200cm	132mm	200mm+300mm drainage	6	AC LED
69050A/W	Stainless steel	Warm white	3000K	20W	1800lm	25°	230V	⏏	200cm	132mm	200mm+300mm drainage	6	AC LED
69026/C	Stainless steel	Cool white	4000K	35W	2800lm	40°	100-240V	⏏	50cm	220mm	255mm+300mm drainage	4	Complete with 1000mA driver




The COB Inground Adjustable Range



A-A⁺⁺

69054 | 15W | COB LED | Stainless steel 316 + tempered glass


TRIAC Dimmable.

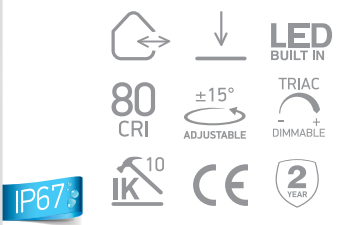

IP67[°]




1 gland + connection box.

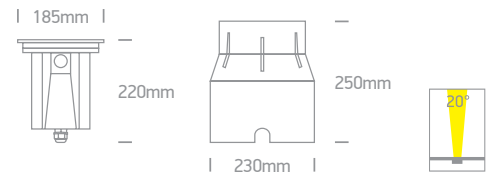

A-A⁺⁺

69054A | 30W | COB LED | Stainless steel 316 + tempered glass


TRIAC Dimmable.

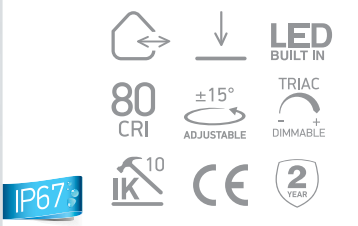


IP67[°]



1 gland + connection box.

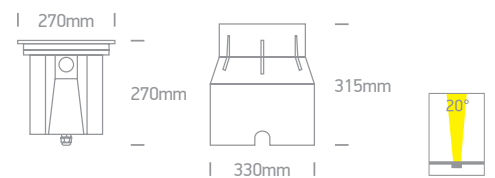

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
69054/W	Stainless steel	Warm white	3000K	15W	840lm	20°	230V		200cm	230mm	270mm+300mm drainage	2	AC LED
69054A/W	Stainless steel	Warm white	3000K	30W	2000lm	20°	230V		200cm	330mm	330mm+300mm drainage	1	AC LED

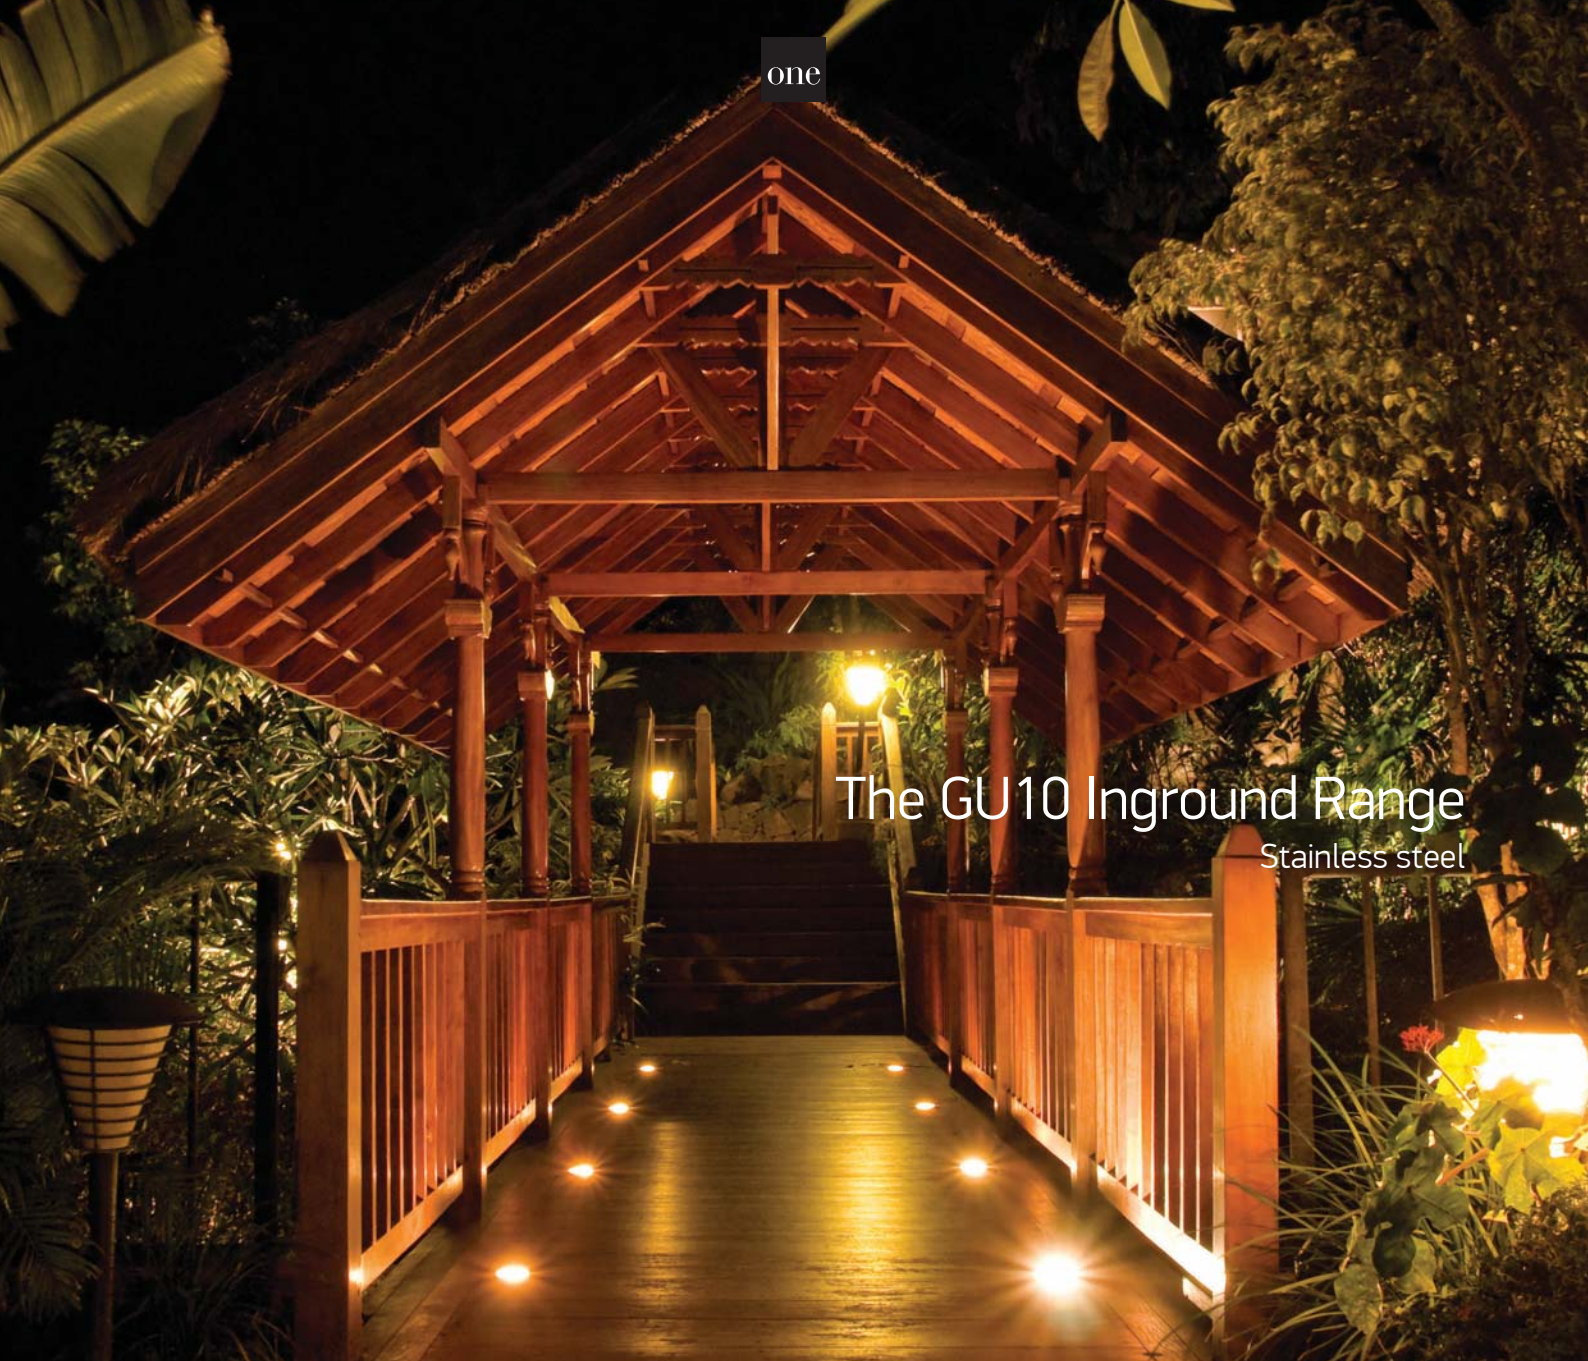

The GU10 Inground Range

Stainless steel



E-A⁺⁺

69006G | 35W | MR16 | GU10 | Stainless steel 316



IP67



E-A⁺

69008G | 35W | MR16 | GU10 | Stainless steel 316



IP67



Order Code	Colour	Watts	Input	Class				Notes
69006G	Stainless steel	35W	100-240V		101mm	160mm+300mm drainage	20	2 glands
69008G	Stainless steel	35W	100-240V		101mm	160mm+300mm drainage	20	2 glands



The GU10 Inground Adjustable Range

Stainless steel 316




69046G | 10W | MR16 | GU10 | Stainless steel 316

Removable light guide.



IP67

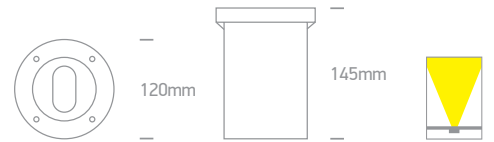

A-A




69048G | 10W | MR16 | GU10 | Stainless steel 316

Removable light guide.



IP67

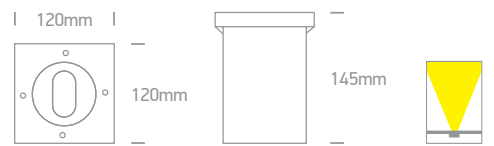

A-A

Order Code	Colour	Watts	Input	Class					Notes
69046G	Stainless steel	10W	100-240V		200cm	115mm	160mm+300mm drainage	12	2 glands
69048G	Stainless steel	10W	100-240V		200cm	115mm	160mm+300mm drainage	12	2 glands




The GX53 Inground Range

Stainless steel



69006 | 9W | GX53 | Stainless steel




IP67



Suitable for GX53 LED lamp.



69008 | 9W | GX53 | Stainless steel



IP67



Suitable for GX53 LED lamp.




Order Code	Colour	Watts	Input	Class				Notes
69006	Stainless steel	9W	100-240V		110mm	90mm+300mm drainage	20	-
69008	Stainless steel	9W	100-240V		110mm	90mm+300mm drainage	20	-

one


Inground Decking Sets




69003 | 3x0,6W | LED | Natural aluminium




Set of 3pcs with connection box, outdoor transformer and boxes for concrete installation.




69002 | 10x0,2W | LED | Stainless steel 304




Set of 10pcs with independent plug + 1m cable.

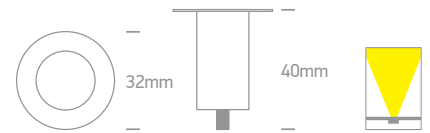

69002/RGB | 10x0,2W | LED | Stainless steel 304



Set of 10pcs with independent plug + 1m cable, RGB remote, receiver + IR sensor with 3m cable.

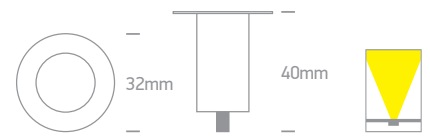

Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class	⚡	🔩	⏏	📦	Notes
69003/W	Aluminium	Warm white	3000K	3x0,6W	230V	□	2m/2m	33mm	80mm	8	-
69003/GR	Aluminium	Green	-	3x0,6W	230V	□	2m/2m	33mm	80mm	8	-
69002/BL	Stainless steel	Blue	-	10x0,2W	100-240V	□	900cm	26mm	50mm	12	Complete with driver
69002/RGB	Stainless steel	RGB	-	10x0,2W	100-240V	□	900cm	26mm	50mm	12	Complete with driver